


Schüco Focusing

SCHÜCO

SchücoFocusIng

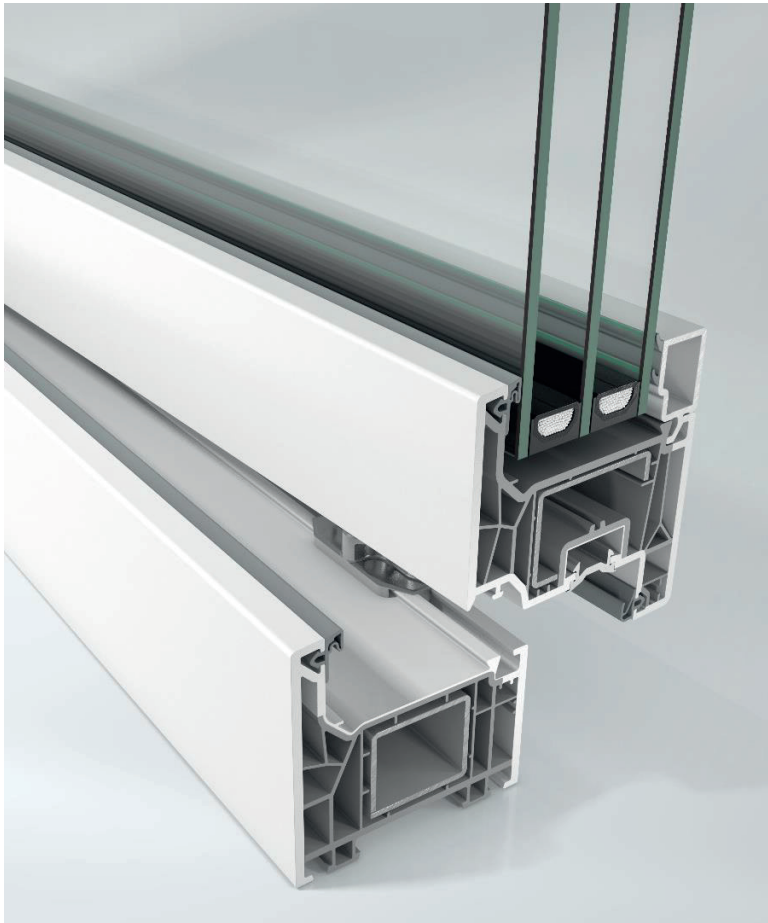

Purpose of introducing the new system

Best performance among profiles with an installation depth of 70 to 82 mm


Competitiveness

Limit range

Efficient processing

Maximum compatibility with existing systems

Characteristics of Schüco Focus**Ing** system

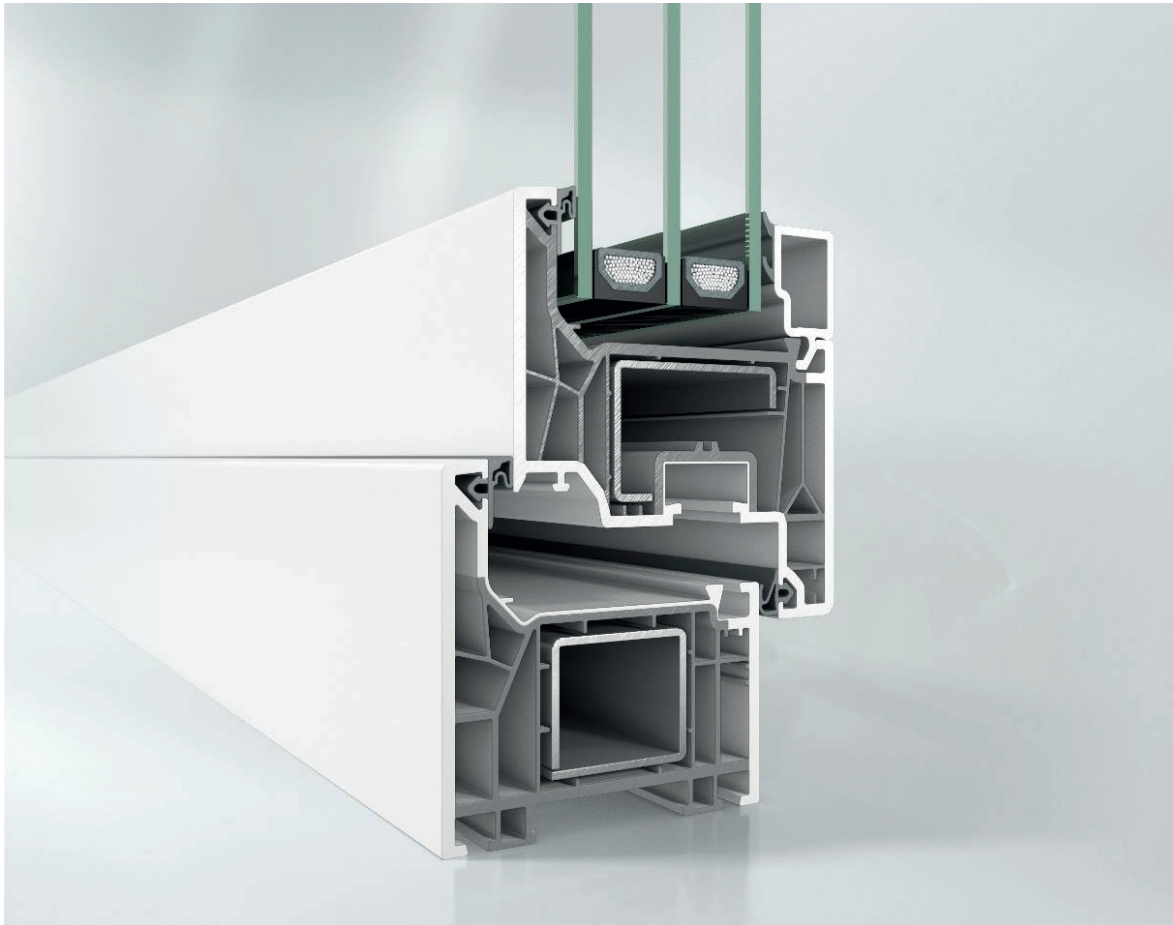

The new PVC system is available in the following variants with 2 gaskets


Narrow rebates for a modern look ('Aluminium-Look')

The system is characterised by maximum thermal insulation properties combined with a narrow, visible profile width

5/6 - chambered profile design with optimised chamber geometry

Optimally suited for the installation of double-glazed units

Characteristics of Schüco Focus**Ing** system

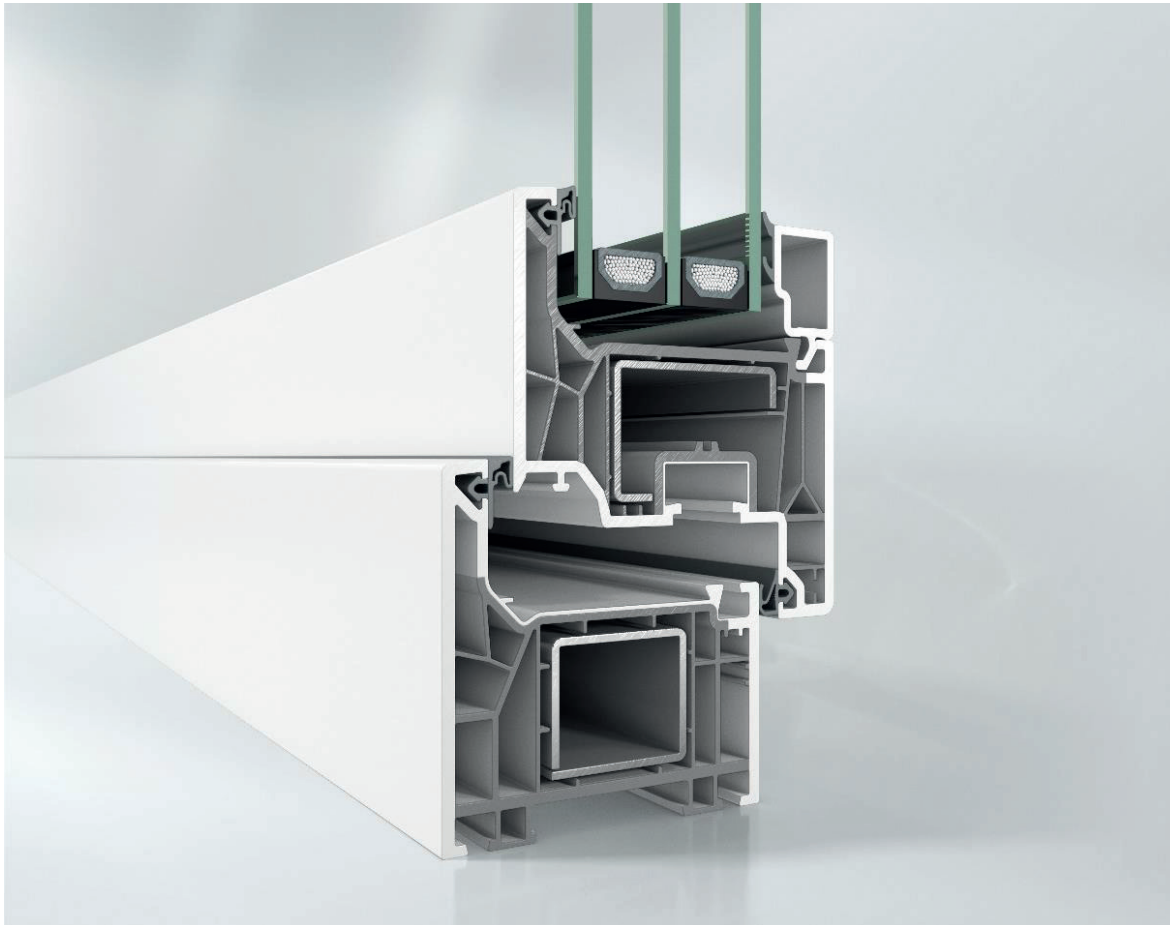

System specifications

Frame installation depth 70mm

Sash installation depth 76mm

Glass installation depth from 20mm

Standardised gasket height 3mm


System design based on Schüco Liv**Ing**

Additional profiles same as CT 70 system

Add-on concept analogous to Schüco Liv**Ing**

Profiles with recycled core

Characteristics of the Schüco Focus**Ing** system

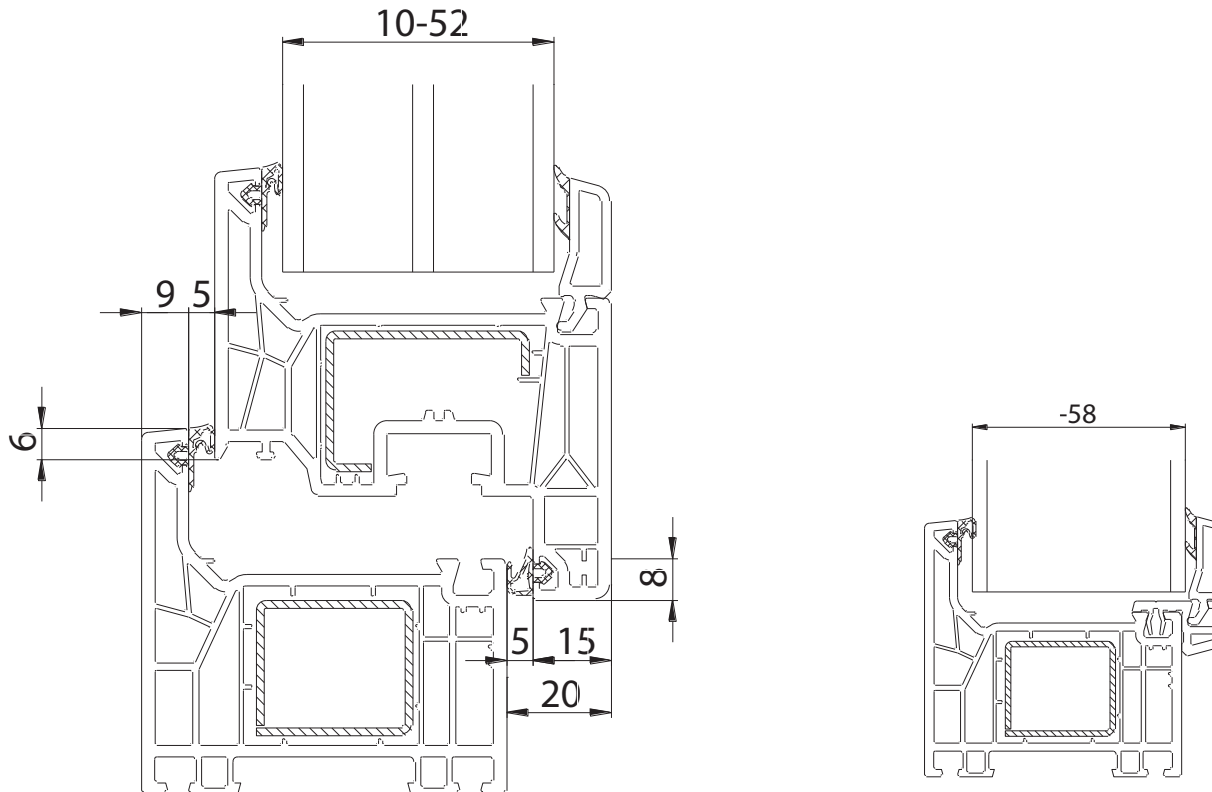

Operational safety

Wall thicknesses according to RAL-GZ/716 and EN 12608 (Class B)

Sash beading: outer 6mm
inside 8mm

Glazing options


Sash 10-52 mm

Fixed glazing up to 46 mm

Fixed glazing + new seal up to 58mm

Characteristics of the Schüco Focus**Ing**

Gaskets

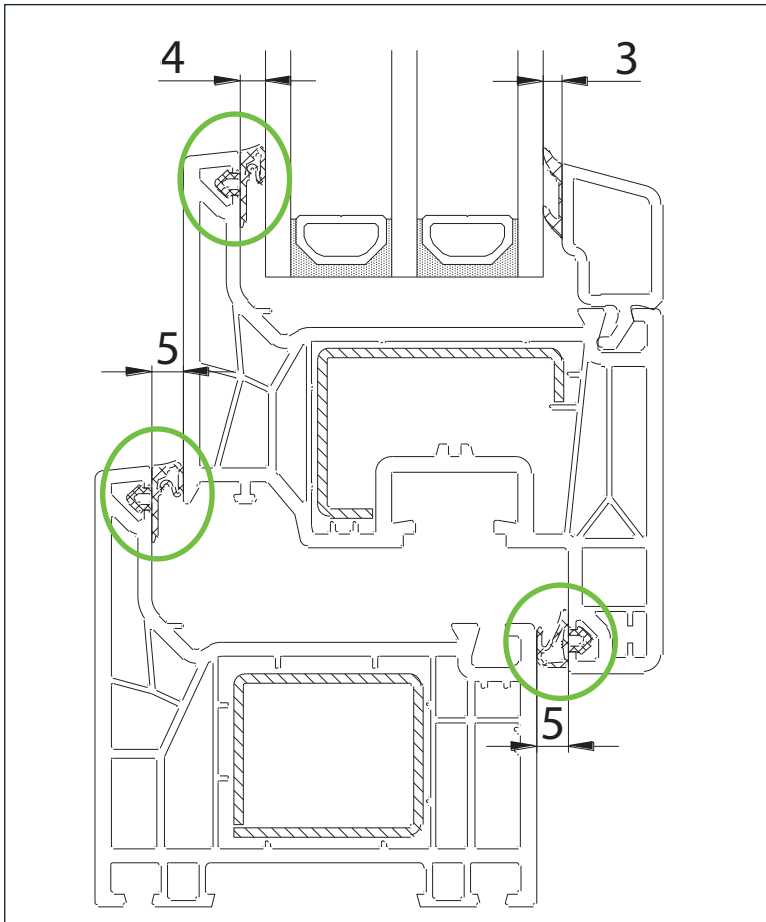

Gasket concept and gasket contour from the Schüco Focus**Ing** system

High tolerance absorption due to 5 mm sealing gap between frame and sash frame

Outer gasket and window seals identical

No gasket replacement with fixed glazing


No need to cut the sash seal in the tilt limiter area

SEBS gasket material

Machine-rolled, weldable SEBS gaskets with exceptional recovery properties and excellent permanent elasticity

Schüco FocusIng

U_f characteristics

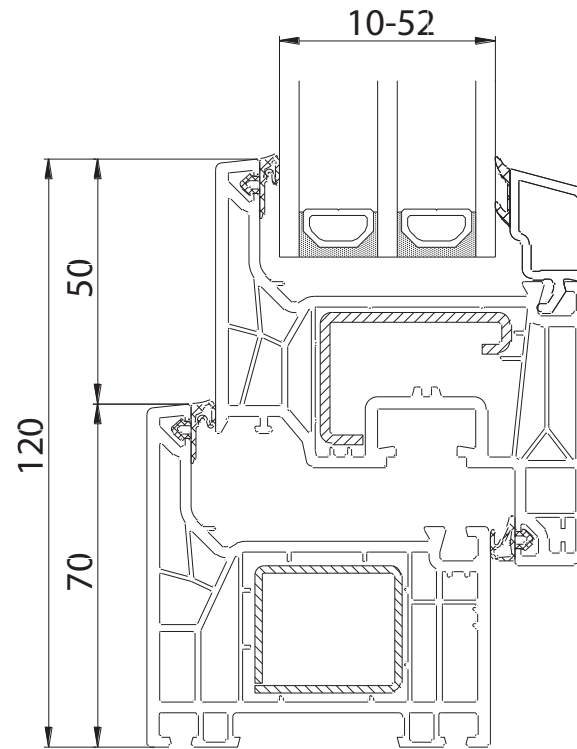


*U_f-Wert 1,2 W/(m²k)



Schüco FocusIng

Overview of product range


9850..
Blendrahmen 70 /70 5K




9851..
Blendrahmen 70 /80 5K

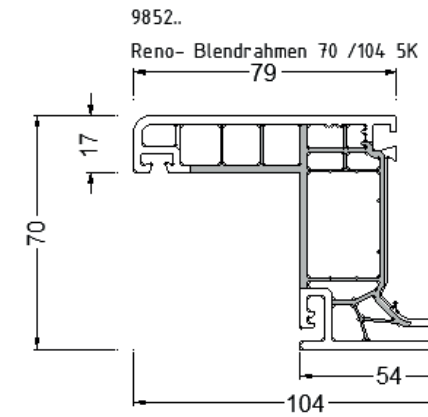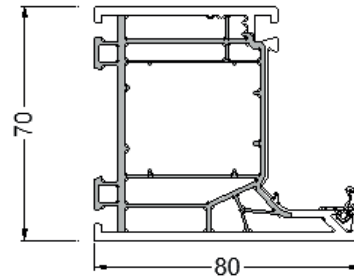


9855..
Flügelrahmen 76 /83 6K



9856..
Flügelrahmen 76 /110 6K

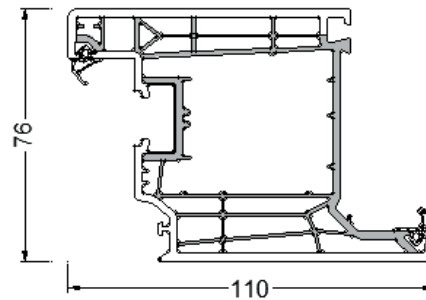


9857..
Flügelrahmen 76 /110 5K naö

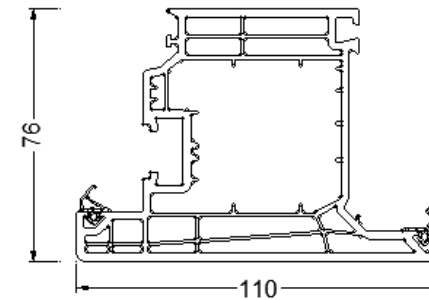


Schüco FocusIng

Overview of product range


9861..
T-Profil 70 / 92 4K

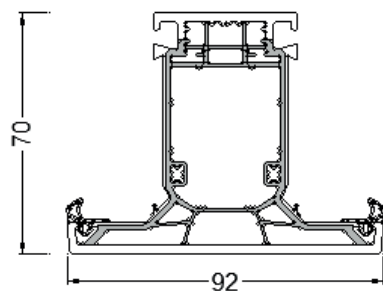


9862..
Sprosse 76 / 92 5K

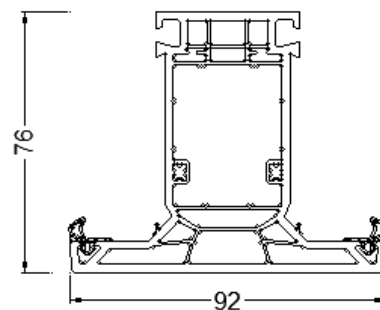

9865..
T-Profil 70 / 112 4K

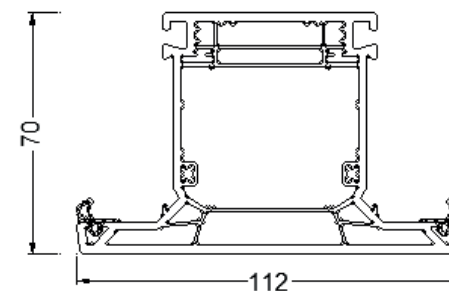

9863..
Stulpprofil 70 / 58



9864..
Stulpprofil 70 / 74 4K

